


# GET-Lite

brighter way to save energy



Light up your world with  
most energy efficient lighting solutions

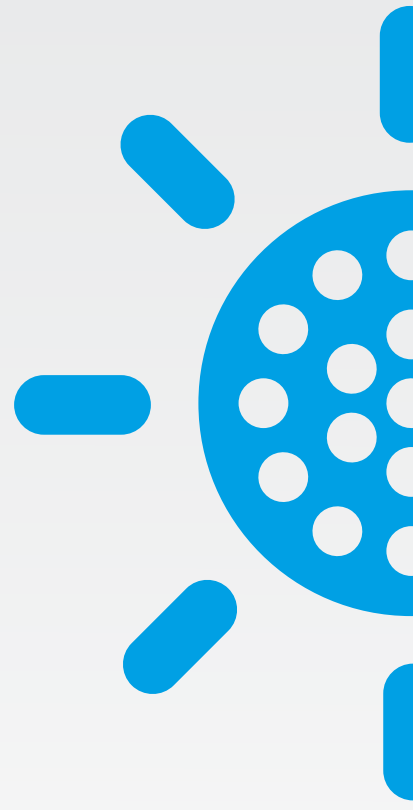

# GETPRO

Street Lights Series

[www.getlite.pk](http://www.getlite.pk)

A PROJECT OF GET TECHNOLOGIES

## Why GETPRO


Our range of GETPRO for road lightening is distinguished by excellent photometric and mechanical performance, as well as the care given to the quality of design. We offer a range of high performing products suitable for all category roads and various other lightening applications. GETPRO models are designed to cater for high ambient temperatures up to 50 centigrade long with surge protection and the longevity of our LED luminaire range.

Get-Lite is providing optimum commercial, industrial and residential lighting solutions with exceptional service and backup support. Get-Lite is an innovator and leader in LED lighting in Pakistan with highest international standards / certifications. Using state of the art Get-Lite designs and produces the most advanced LED Lights & Fixtures in the market today.

We stand behind our products with substantial warranties, offers unmatched protection against the rigors of outdoor exposure. Get-Lite is committed to delivering the best solutions on the market, inspired by the needs of our customers and perfected by the knowledge and expertise of our engineers. We recognize the importance of beautiful energy-efficient lighting and aspire to improve every business with uncompromising performance and payback.



# Its time to LED your world!

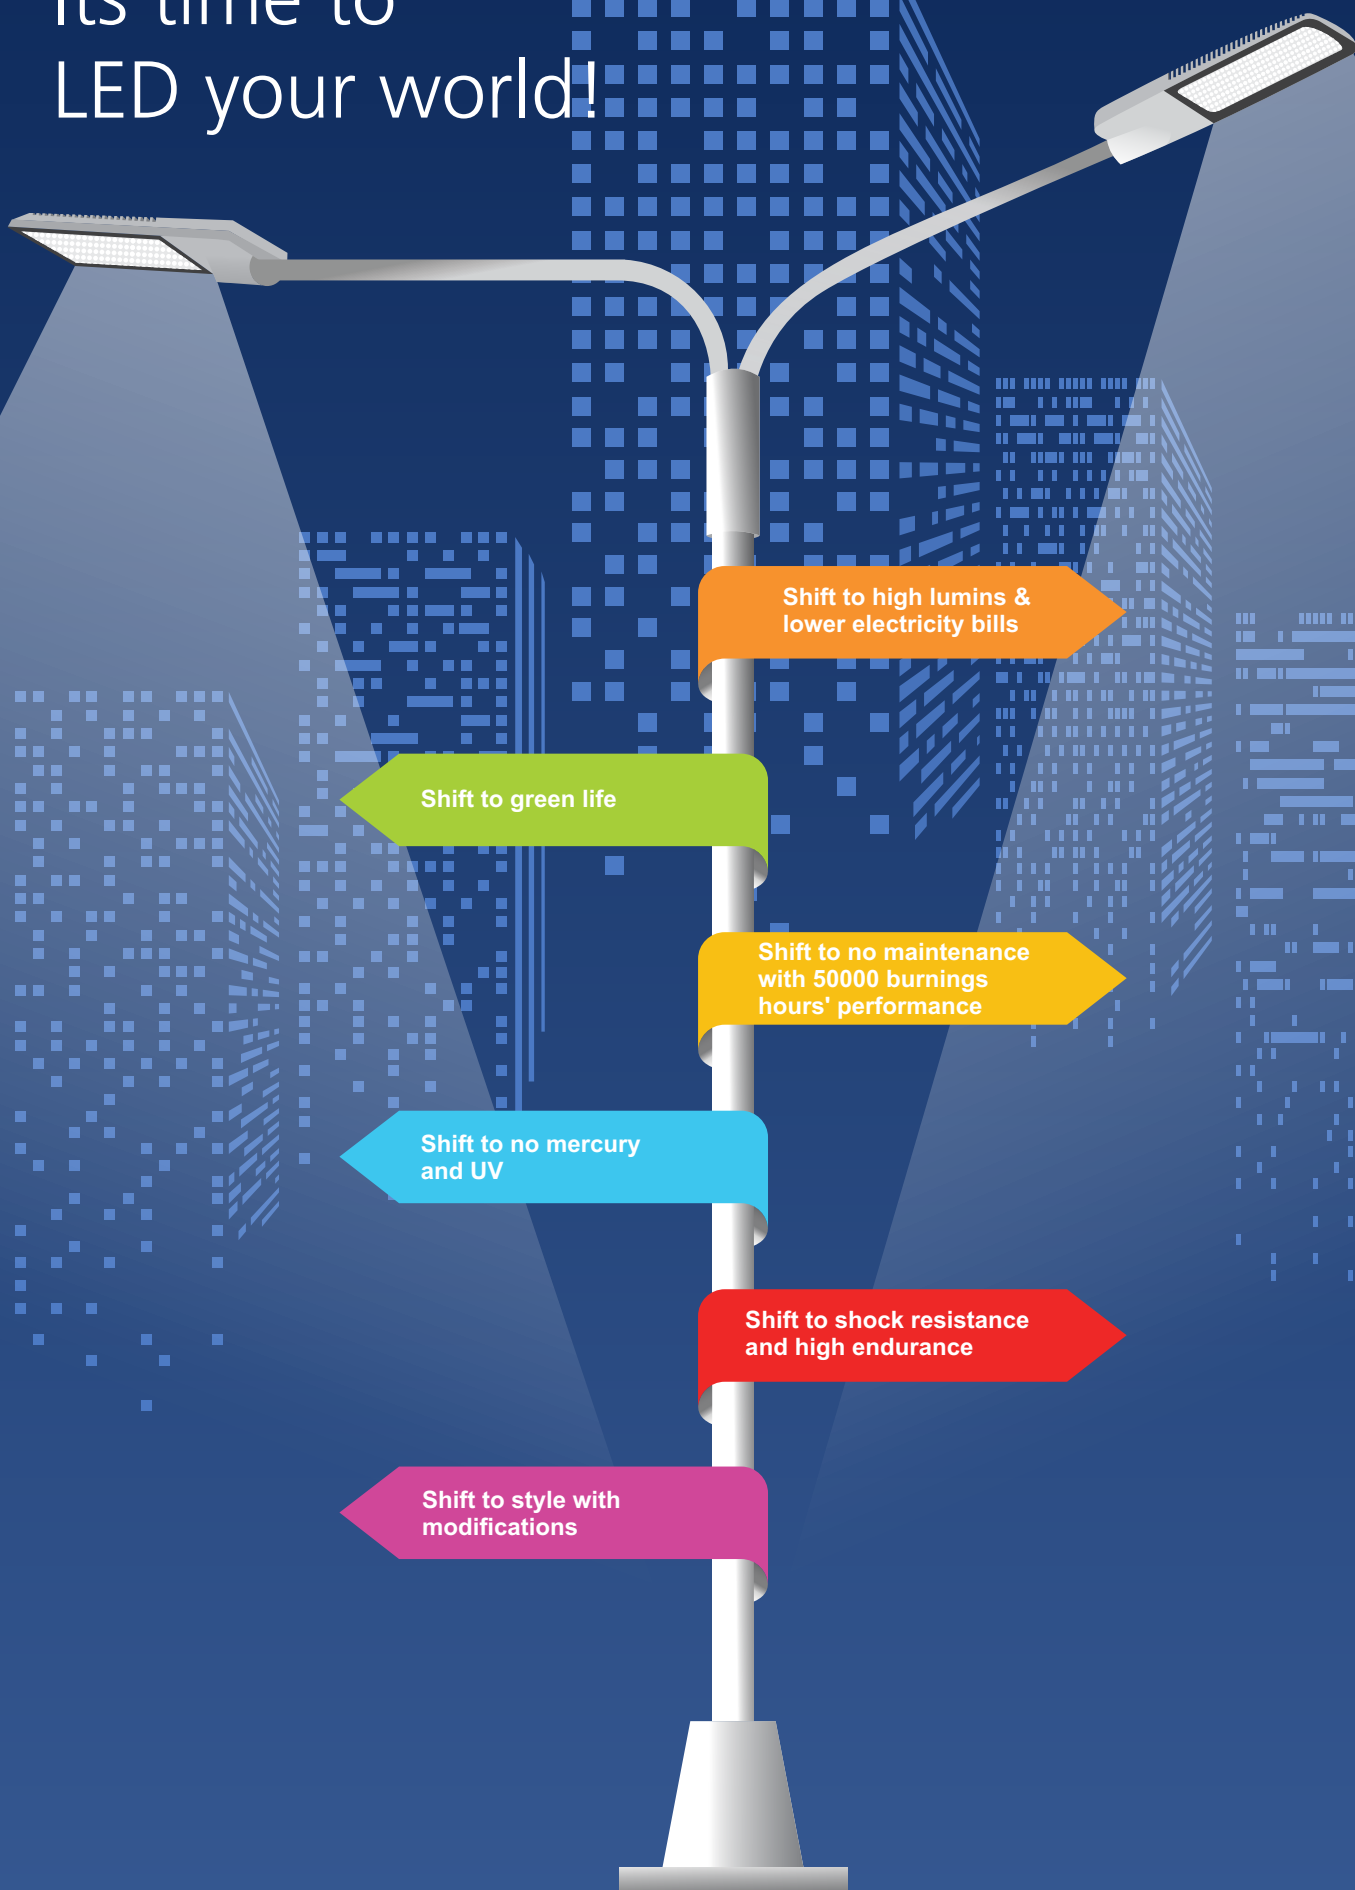

Shift to high lumens &  
lower electricity bills


Shift to green life

Shift to no maintenance  
with 50000 burnings  
hours' performance

Shift to no mercury  
and UV

Shift to shock resistance  
and high endurance

Shift to style with  
modifications






# GET-Lite

brighter way to save energy

## GETPRO 1




New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

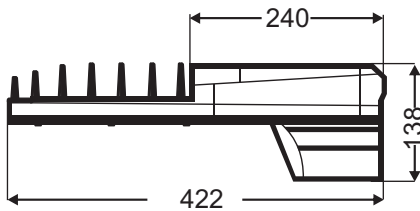

### Product Specifications


|                        |   |
|------------------------|---|
| Housing                | Aluminum Die cast housing with ambient heat dissipation design with Ip66 and Ik10 rating.   |
| Finish                 | Gray painted housing  |
| Light Source           | High efficiency globally branded LEDs with Ra≥70 CREE(USA) / NICHIA (Japan)   |
| Optics                 | IESNA Type I, II, III optics as per requirement using globally branded lenses   |
| Control gear           | Built-in high efficient electronic drivers-Meanwell (Taiwan), Inventronics (China), Phillips (Mexico) with Power Factor≥0.95, THD≤15%, Surge Protection≥20KVA, Plug n Play detachable connectors. |
| Mounting & Maintenance | 48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.   |
| Applications           | Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.   |



| Model    | Power Consumption | Voltage Range | Power Factor | Colour Temp. (CCT) | System Luminous Efficacy Lm/ W | Weight |
|----------|-------------------|---------------|--------------|--------------------|--------------------------------|--------|
| GETPRO 1 | 30-100 W          | 100 - 277 V   | ≥0.95        | 3000 - 6500 K      | ≥120                           | 6.4 KG |

Working Temperature: -40~+55 C








# GET-Lite

brighter way to save energy

## GETPRO 2




New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

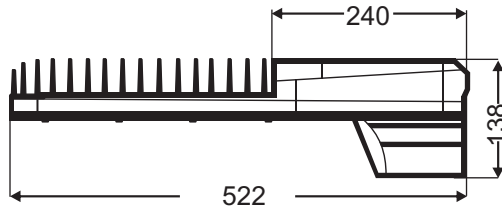

### Product Specifications


|                        |  |
|------------------------|--|
| Housing                | Aluminum Die cast housing with ambient heat dissipation design with Ip66 and Ik10 rating.  |
| Finish                 | Gray painted housing   |
| Light Source           | High efficiency globally branded LEDs with Ra $\geq$ 70 CREE(USA) / NICHIA (Japan)   |
| Optics                 | IESNA Type I, II, III optics as per requirement using globally branded lenses  |
| Control gear           | Built-in high efficient electronic drivers-Meanwell (Taiwan), Inventronics (China), Phillips (Mexico) with Power Factor $\geq$ 0.95, THD $\leq$ 15%, Surge Protection $\geq$ 20KVA, Plug n Play detachable connectors. |
| Mounting & Maintenance | 48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.  |
| Applications           | Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.  |



| Model    | Power Consumption | Voltage Range | Power Factor | Colour Temp. (CCT) | System Luminous Efficacy Lm/ W | Weight |
|----------|-------------------|---------------|--------------|--------------------|--------------------------------|--------|
| GETPRO 2 | 110-140 W         | 100 - 277 V   | $\geq$ 0.95  | 3000 - 6500 K      | $\geq$ 120                     | 8.8 KG |

Working Temperature: -40~+55 C







# GET-Lite

brighter way to save energy

## GETPRO 3




New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

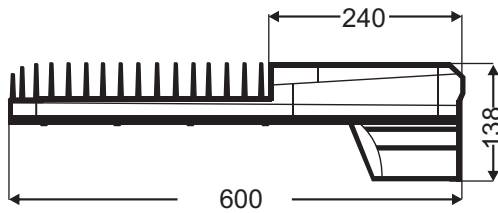

### Product Specifications

|                        |   |
|------------------------|---|
| Housing                | Aluminum Die cast housing with ambient heat dissipation design with Ip66 and Ik10 rating.   |
| Finish                 | Gray painted housing  |
| Light Source           | High efficiency globally branded LEDs with Ra≥70 CREE(USA) / NICHIA (Japan)   |
| Optics                 | IESNA Type I, II, III optics as per requirement using globally branded lenses   |
| Control gear           | Built-in high efficient electronic drivers-Meanwell (Taiwan), Inventronics (China), Phillips (Mexico) with Power Factor≥0.95, THD≤15%, Surge Protection≥20KVA, Plug n Play detachable connectors. |
| Mounting & Maintenance | 48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.   |
| Applications           | Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.   |



| Model    | Power Consumption | Voltage Range | Power Factor | Colour Temp. (CCT) | System Luminous Efficacy Lm/ W | Weight  |
|----------|-------------------|---------------|--------------|--------------------|--------------------------------|---------|
| GETPRO 3 | 150-190 W         | 100 - 277 V   | ≥0.95        | 3000 - 6500 K      | ≥120                           | 10.2 KG |




Working Temperature: -40~+55 C



## GETPRO 4




New generation energy saving long life & versatile LED roadway luminaire with high power LED as light source

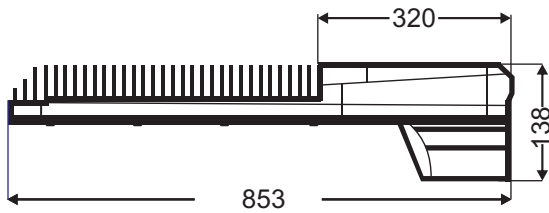

### Product Specifications


|                        |   |
|------------------------|---|
| Housing                | Aluminum Die cast housing with ambient heat dissipation design with Ip66 and Ik10 rating.   |
| Finish                 | Gray painted housing  |
| Light Source           | High efficiency globally branded LEDs with Ra≥70 CREE(USA) / NICHIA (Japan)   |
| Optics                 | IESNA Type I, II, III optics as per requirement using globally branded lenses   |
| Control gear           | Built-in high efficient electronic drivers-Meanwell (Taiwan), Inventronics (China), Phillips (Mexico) with Power Factor≥0.95, THD≤15%, Surge Protection≥20KVA, Plug n Play detachable connectors. |
| Mounting & Maintenance | 48 to 65mm pole slide entry. Toolless opening of tray and control gear compartment.   |
| Applications           | Highways & Expressways, Main Roads, Parking Areas Commercial, Industrial and Residential streets.   |



| Model    | Power Consumption | Voltage Range | Power Factor | Colour Temp. (CCT) | System Luminous Efficacy Lm/ W | Weight  |
|----------|-------------------|---------------|--------------|--------------------|--------------------------------|---------|
| GETPRO 4 | 200-310 W         | 100 - 277 V   | ≥0.95        | 3000 - 6500 K      | ≥120                           | 14.5 KG |

Working Temperature: -40~+55 C



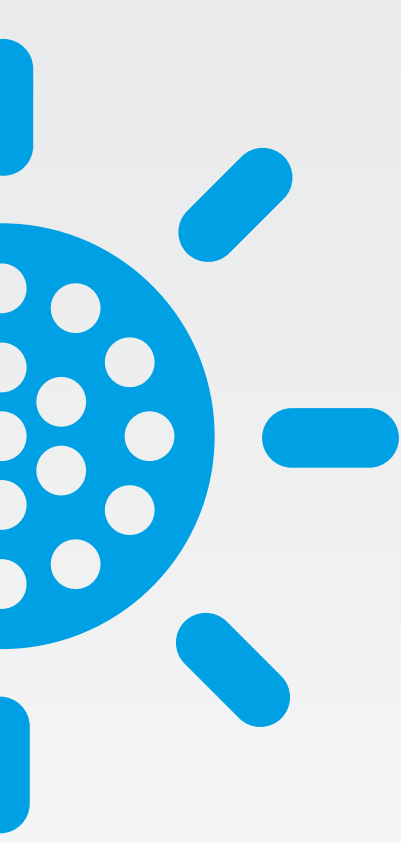

27/A Commercial Area, Khayaban-e-Iqbal, Sector XX, Phase 3, DHA, Lahore  
email: [info@getlite.pk](mailto:info@getlite.pk) website: [www.getlite.pk](http://www.getlite.pk) UAN: +92(42)111000179 fax: +92(42)35693723

